

Elevator

**ALAMEX**

Ascending Together

[www.alamex.com.tr](http://www.alamex.com.tr)

# ASCENDING TOGETHER

HOME LIFT  
PRODUCT  
CATALOGUE

2023



## THE ELLIES 2022

Best Supplier – Parts  
Headquarters: Bloomfield,  
Connecticut  
Runner up: Alamex  
Headquarters: Mexico City



# ABOUT ALAMEX

We are a young and dynamic company, we began operations in Latin America in 2011, with more than 20 years of experience. At Alamex, we design top-quality lifting solutions with cutting-edge innovations.

Alamex is a company specialized in designing, developing, manufacturing, distributing, installing, and maintaining high-tech lifting solutions. We produce all types of elevator systems including passenger elevators, home elevators, platform elevators, dumbwaiters, construction elevators, cargo elevators, and more.

We have exports to more than 55 countries in Europe, North America, South America, Africa, Asia & Australia.

All our products are manufactured in accordance with the latest European Standards for Safety and Quality, which guarantees high durability with minimal maintenance.



## Elevator Systems

- Passenger Elevator
- Home Elevator
- Platform Elevator
- Service Elevator (Dumbwaiter)
- Cargo Elevator



## Parking Systems

- Car Lift Platform
- Car Stack
- Automated Parking Systems



## Escalators & Moving Walkways

- Escalators
- Moving Walkways





**20**  
**YEARS**  
OF EXPERIENCE





# WHY CHOOSE US



Lifting solutions from conceptualization and design to specify the installation and maintenance.



National and international certifications of compliance with the latest safety and quality standard.



24/7 customer support in 6 languages





# CERTIFICATES



## TYPE EXAMINATION CERTIFICATE

Issued by Liftinstituut B.V.  
Revision no.: -

Certificate no. NL22-400-1002-338-04  
Description of the product Mono-block integrated lift controller with STO

Trademark Elevators Alamex  
Type no. MINI-INTELLIGENT  
Name and address of the manufacturer ALAMEX ELEVATOR  
Fevçiçakmak Mah. İnanç Sanayi Sitesi Gülistan Cad. No:40/A  
Karatay/Konya  
Name and address of the certificate holder ELEVAADORES ALAMEX, S.A. DE C.V. Av. Tlalhuac 219, C.P. 09840, COMEX, Mexico

Certificate issued on the following requirements  
Lifts Directive 2014/33/EU  
Parts of EN 81-20:2020 and EN 81-50:2020  
Parts of EN 81-1:1998+A3:2009

Test laboratory EMC Test ve Kontrol Hizmetleri  
LVT Test Laboratuvarları  
SASTEK

Date and number of the laboratory report EAC07D-0319\_V0 24-03-2021  
20\_303\_4363\_0-1\_03-21 26-03-2021  
N04-001\_01-21 05-02-2021

Date of type-examination 21-04-2022

Additional document with this certificate Annex belonging to the type examination certificate no. NL22-400-1002-338-04 rev. 1

Additional remarks EN 81-50, clause 5.8, 5.9 and 5.13 (as well as EN 81-10+A3 Annex F, B, F.8 and F.8) examination and testing were included in the examination.

Conclusion Size chapter 3 of the annex belonging to this type-examination certificate for additional conditions  
The product specified meets the requirements referred to in this certificate taking into account any additional remarks mentioned above.

Amendment Date 21-04-2022  
Valid until 08-04-2026  
Ing. A.J. van Ommen  
International Business Manager  
Certificate decision by

Registered at the lift institute number: 34270203





# INTERNATIONAL PRESENCE



Thanks to our professional team, we could improve our product quality and develop new technologies to the extend that we became internationally well-known for our unique products and services.

Our exports extends internationally, currently to more than 55 countries in 5 continents around the world.

We also provide a 24/7 customer support in 6 languages.



**Barbados**  
Canada  
**Costa Rica**  
Guatemala  
**Mexico**  
Panama  
**The Salvador**  
USA

**Colombia**  
Paraguay

**Algeria**  
Egypt  
**Ethiopia**  
Kenya  
**Libya**  
Mauritania  
**Morocco**  
Mozambique  
**Tunisia**  
Zanzibar

**Belarus**  
Danimark  
**Greece**  
Italy  
**Netherlands**  
Romania  
**Russia**  
Slovakia  
**Ukraine**

**Armenia**  
Bahrain  
**Dubai**  
Azerbaijan  
**Georgia**  
Iraq  
**Jordan**  
Kazakhstan  
**Kuwait**  
Lebanon  
**Oman**  
Palestine  
**Philippines**  
Qatar  
**Saudi Arabia**  
Syria  
**Turkmenistan**  
UAE

**Australia**



Elevator

**ALOMEX**

Ascending Together



**HOME  
LIFT**

**ASCENDING  
TOGETHER**



## HYDRAULIC CARGO ELEVATOR

It is suitable for use in industrial facilities and warehouses. The flexibility in dimensions and capacities make it adaptable for any special requirement.

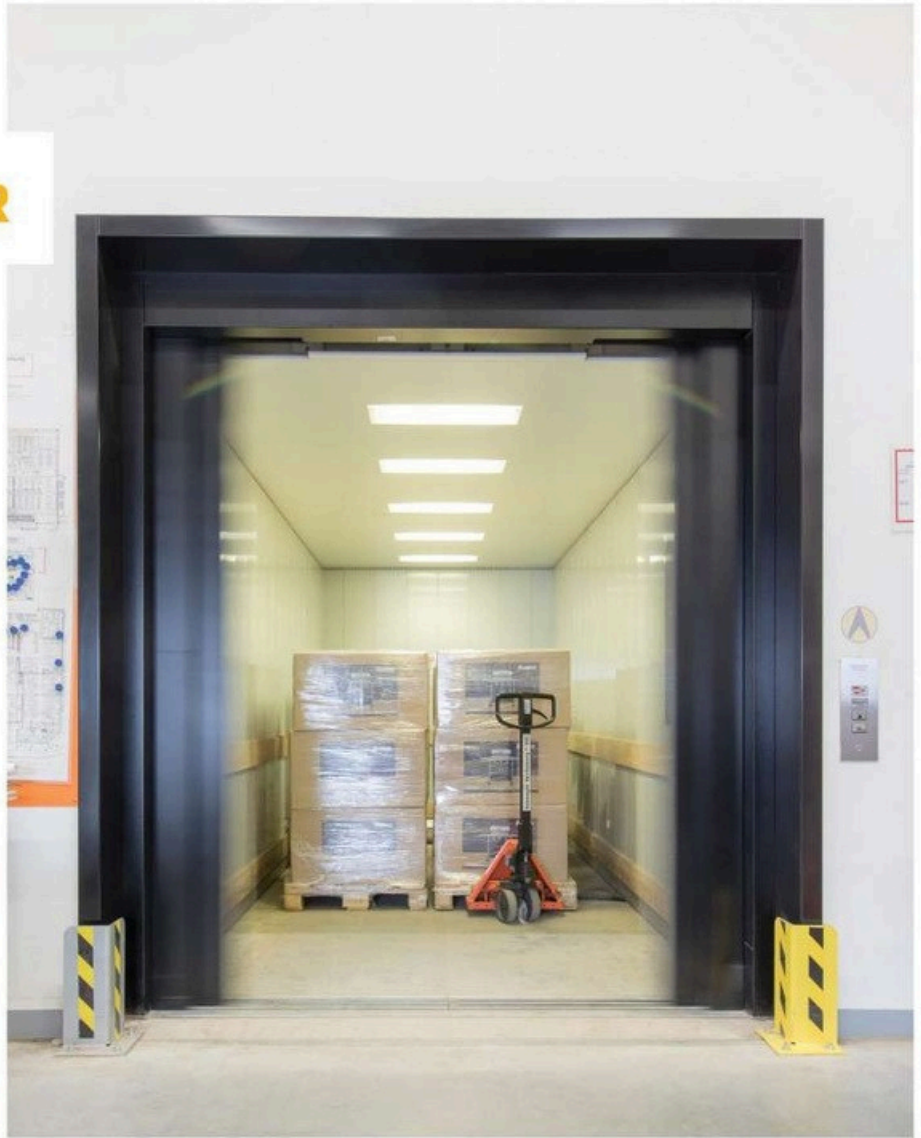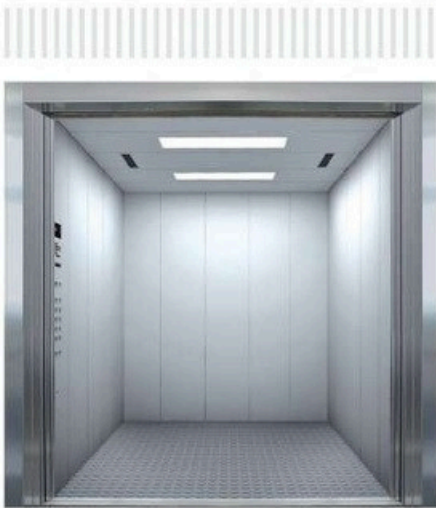

Manufactured in accordance with machinery directive 2006/42 / EC and EN-81.



Pre-assembled in rigid steel structure.



Available with platform, half cab, or full cab



Minimum requirements in bucket depth and machine room.



Capacity from 200 to 5,000 Kg.



Maximum speed of 0.6 m / s



## HYDRAULIC ELEVATOR PLATFORM ELEVATOR

At Alamex we present a new lifting solution for limited spaces, where the dimensions of some architectural space are not possible to place a conventional elevator, giving rise to the flexibility and easy installation of a home lift.

The great advantages of the home lift is that it optimizes the available spaces in new or existing buildings, having minimal electrical consumption, an avant-garde design and easy installation.



Minimum requirements in bucket depth and machine room.



Capacity from 200 to 5,000 Kg.



Maximum speed of 0.6 m / s



Manufactured in accordance with machinery directive 2006/42 / EC and EN-81.



Pre-assembled in rigid steel structure.



Available with platform, half cab, or full cab






## ENCLOSED PLATFORM LIFT



Easy and trouble-free installation in any area as it does not require a pit

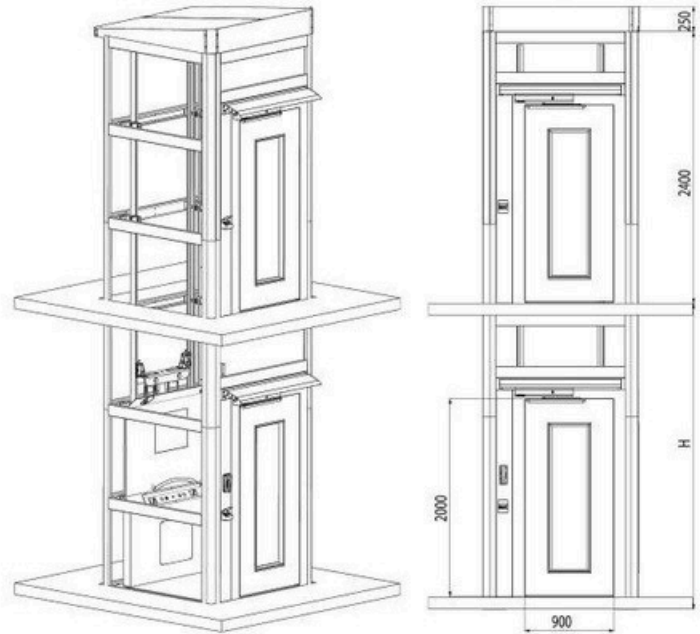

### EXPLANATION

This model has wide area of usage. The drive system of the lift can be Hydraulic or Screw. It can be used safely and meet your requirements indoor and outdoor. The lift is easy to install and can be placed directly onto the floor, not required pit. It does not need extra construction during the installation. It has 7 stops and helps to customer not to waste time. The outdoor lift is equipped to resist to extreme weather conditions.

Area of usage: Schools, Temples, Police stations, Rehabilitation centers, Public institutions, Private health institutions, Training centers. KP 901 model is produced within the standards of 2006/42 / EC regulations and supplied to the market with CE certificate. User and environment safety are in the highest level.







## TECHNICAL SPECIFICATIONS

Drive Type	Hydraulic / Worm Screw
Load Capability	315 / 400 kg
Distance	15 mt
Speed	0,15 mt/sec
Platform Internal Dimensions	1100*1400 mm / (Standard Dimension)
Platform External Dimensions	1600*1600 mm / (Standard Dimension)
Pit	120 mm – 150 mm – 250 mm
Door	Fully Automatic
Emergency Rescue System	Ups / Manual
Announcement System	3 Languages / English, Arabic, France, Spain
Intercom System	Available
Main power requirement	220 V AC - 50 Hz -Monofaze / 380 V AC - 50 Hz -Three Phase



**CABIN HEIGHT**  
2.500 mm



**INSTALLATION**  
In 3-4 Days



**POWER SUPPLY**  
220 - 380 v (AC)



**TOTAL SPEED**  
0,15 m/s



**GUARANTEE**  
2 Years



**FLOOR NUMBER**  
7



**DRIVE SYSTEM**  
Hydraulic - Screw





**TRAVEL HEIGHT**  
15 m



**CABIN OPTIONS**  
Platform - Cabin




## ENCLOSED PLATFORM LIFT

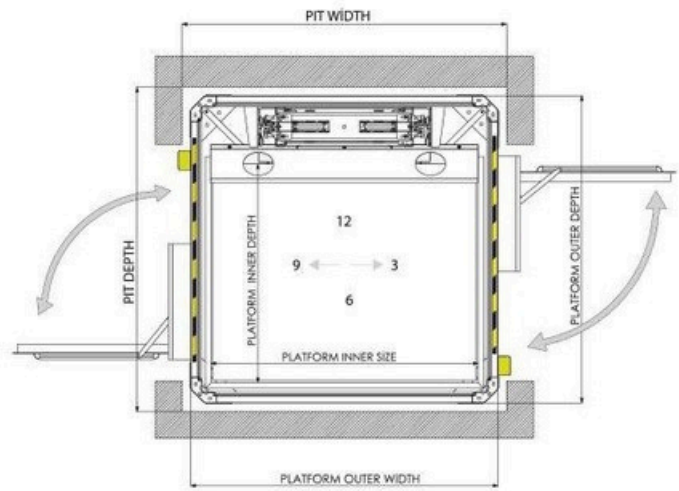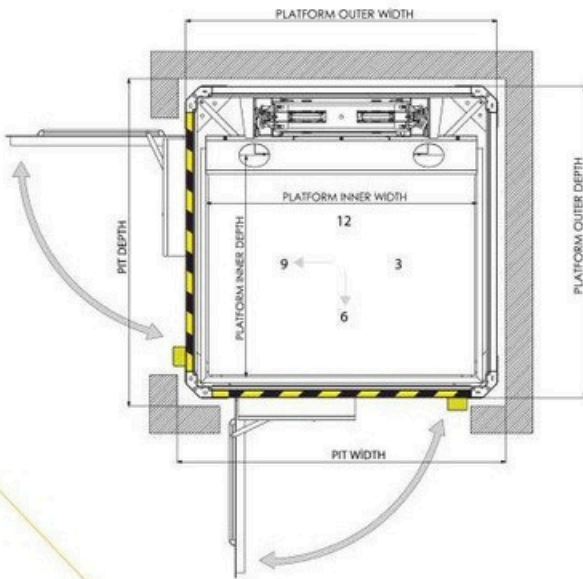

### ELEVATOR STRUCTURE COLOR



### GLASS COLOR OPTIONS

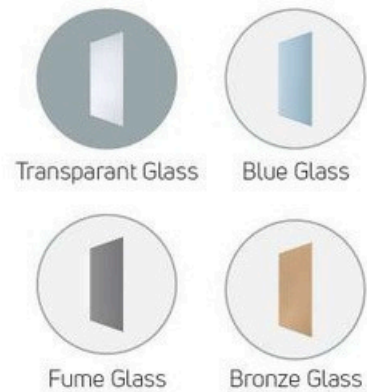

### ELEVATOR STRUCTURE TYPE

RAL Paint

### DOOR TYPE

- Circleslide Automatic Door
- Telescopic Door
- Manual Door









## CABIN - TELESCOPIC CLOSED PLATFORM



Easy and trouble-free installation in any area as it does not require a pit

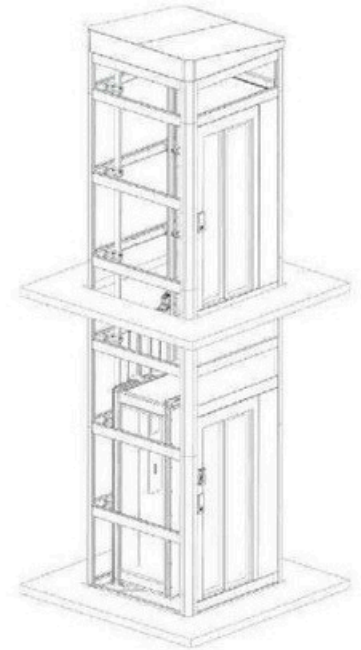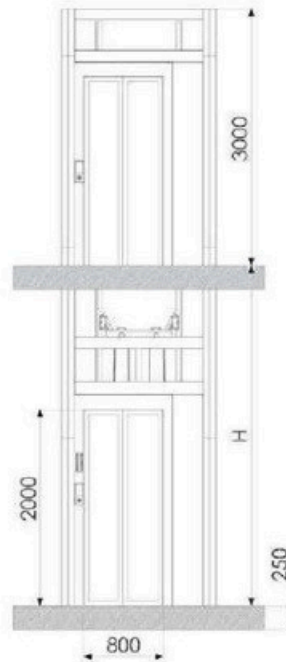

### EXPLANATION

This model has wide area of usage. The drive system of the Lift can be Hydraulic or Screw. It can be used safely and meet your requirements indoor and outdoor. The lift is easy to install and can be placed directly onto the floor, not required pit. It does not need extra construction during the installation. It has 7 stops and helps to customer not to waste time. The outdoor lift is equipped to resist to extreme weather conditions.

Area of usage: Schools, Temples, Police stations, Rehabilitation centers, Public institutions, Private health institutions, Training centers. KP 901 model is produced within the standards of 2006/42 / EC regulations and supplied to the market with CE certificate. User and environment safety are in the highest level.







## TECHNICAL SPECIFICATIONS



Product Information	KP 901 Cabin type technical specification
Number of Stop	Min. 2 stops (Diagonal)
Travel Distance	Minimum 500 mm - Maximum optional
Speed	Minimum 0,07 mt/sn-Maximum 0,40 mt/sn
Carrying capacity	Minimum 250 kg - Maximum 400 kg
Steel Structure	Laser Cut Steel ESB Painted
Steel Structure Coating	White Glass - Fumed Glass Colored Glass (Green, yellow, Blue) Composite (colored)
Doors	Swing Door (Circular Automatic Door) Telescopic Door (Full Automatic)
Floor door size	Minimum 600x2000mm Maximum 900X2000 mm
Cabin door size	Minimum 600x2000mm Maximum 900X2000 mm
Platform inner size	Minimum 750x440mm Maximum 1100*1300 mm
Platform outer size	Minimum 1000x1000mm Maximum 1600*1600 mm
Platform outer color	RAL 7012 – 7016 – 7032 – 7035 - 9006 – 9016
Cabin	Yes
Cabin coating	304 Quality Stainless Steel Decostil Cabin - Glass Cabin - Wooden Cabin
Drive system	Double Speed Hydraulic, Soft Stop Start, Silent Unit
Pit depth	Minimum 250 mm

	<b>CABIN HEIGHT</b> 2.500 mm
	<b>TOTAL SPEED</b> 0,15 m/s-0,40 m/s
	<b>DRIVE SYSTEM</b> Hydraulic
	<b>INSTALLATION</b> In 4 Days
	<b>GUARANTEE</b> 2 Years
	<b>TRAVEL HEIGHT</b> 15 m
	<b>POWER SUPPLY</b> 220 - 380 v (AC)
	<b>FLOOR NUMBER</b> 7
	<b>CABIN OPTIONS</b> Platform - Cabin






## CABIN - TELESCOPIC **CLOSED PLATFORM**

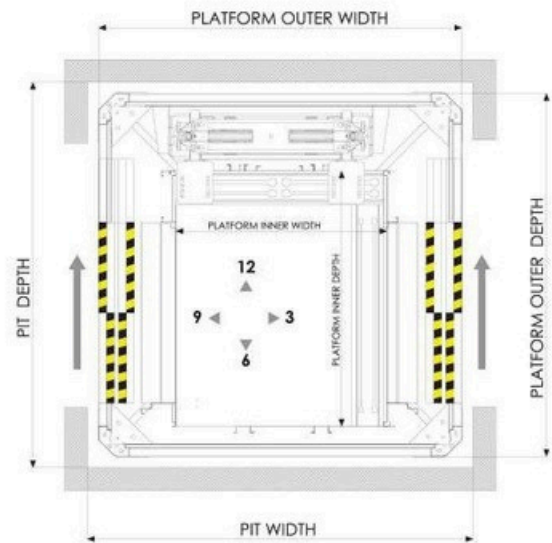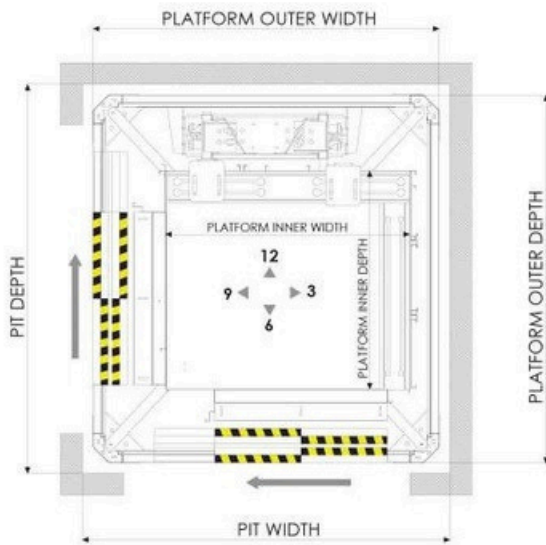

### ELEVATOR STRUCTURE COLOR

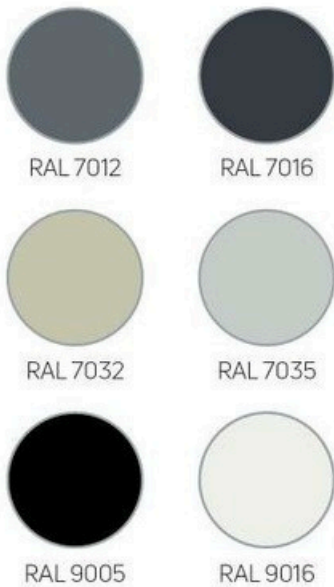

### GLASS COLOR OPTIONS



### ELEVATOR STRUCTURE TYPE

RAL Paint

### DOOR TYPE


- Circleslide Automatic Door
- Telescopic Door
- Manual Door



## OPEN PLATFORM LIFT



User and environmental safety is kept at the highest Level

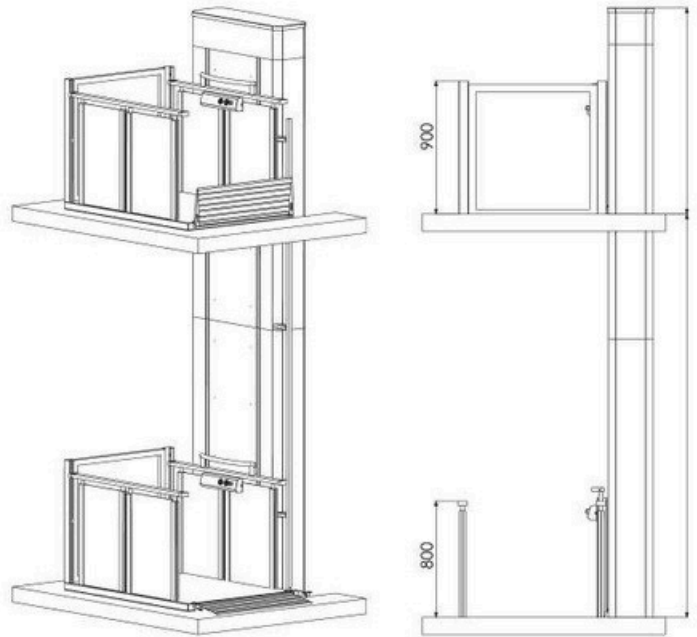

### EXPLANATION

This model structured on double pillars. It has high safety standards and stylish. It can be used safely inside and outside. The outer cover is made of steel sheet with a electrostatic coating (stainless steel cover is optional). Does not required pit and can travel up to 3 meter height.

Areas of usage; School, Temples, Police station, Rehabilitation center, Public institutions, Hotels, Health facilities, Training centers, Housing estates.

MK 901 model is manufactured within the standards of 2006/42 / EC and is presented to the market with CE marking. User and environment safety are in highest level.







## TECHNICAL SPECIFICATIONS

Drive Type	Hydraulic / Screw
Carrying Capacity	315 kg
Maximum Travel Distance	3 mt
Working Speed	0,15 mt/sec
Platform Internal Dimensions	900*1400 mm / (Standart Dimension)
Platform External Dimensions	1400*1400 mm / (Standard Dimension)
Pit	100 mm
Door	Automatic Locking-Safety Switch (Optional)
Controls	Locked Controls On Floors And Platform Emergency Stop Button
Safety	Anti Jamming Switches Under The Table / Bellows (Optional)
Main power requirement	220 V AC -50 Hz-Monofaze 220 V AC- 50 Hz-Single Phase 380 V AC -50 Hz-Monofaze 380 V AC- 50 Hz-Single Phase



**CABIN HEIGHT**  
1000 mm



**INSTALLATION**  
In 1-2 Days



**POWER SUPPLY**  
220 - 380 v (AC)



**TOTAL SPEED**  
0,15 m/s



**GUARANTEE**  
2 Years




**FLOOR NUMBER**  
2





**DRIVE SYSTEM**  
Hydraulic - Screw




**TRAVEL HEIGHT**  
3 m

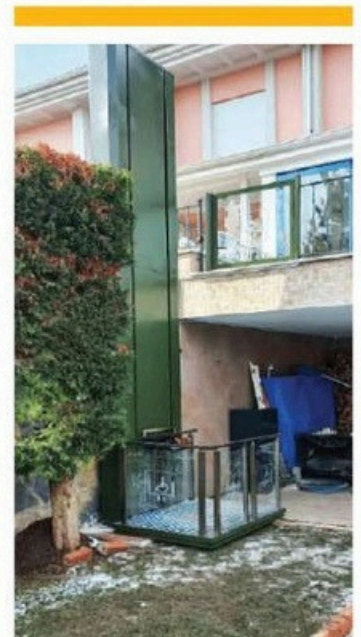


## OPEN PLATFORM LIFT

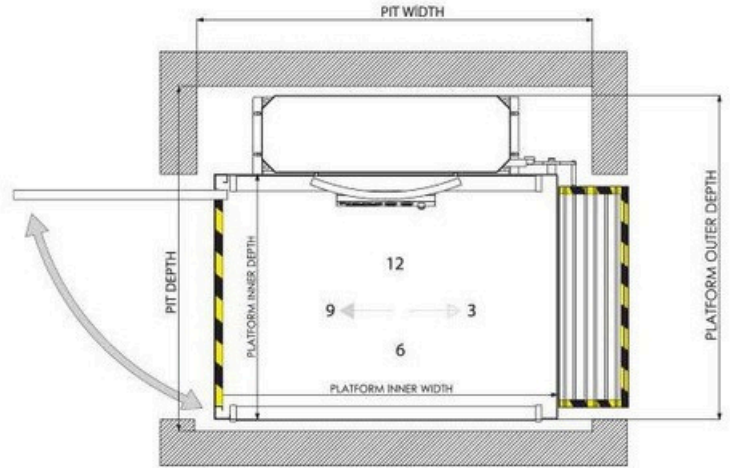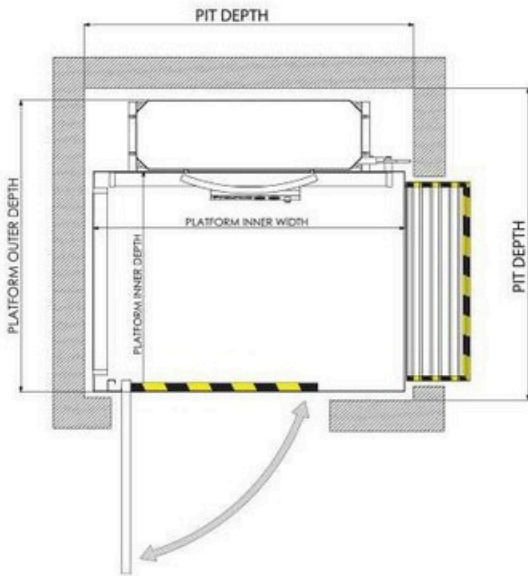

### GLASS COLOR OPTIONS

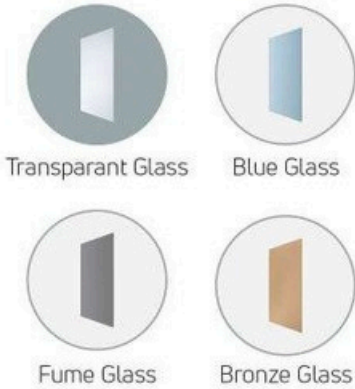

### ELEVATOR STRUCTURE COLOR

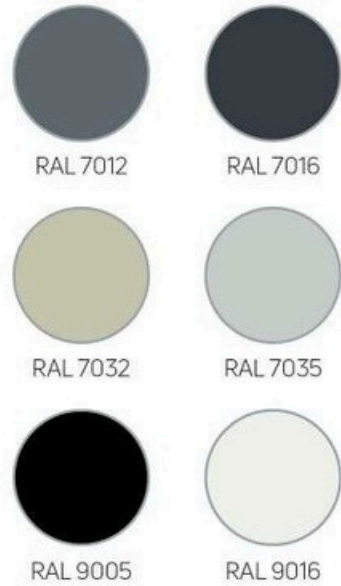

### ELEVATOR STRUCTURE TYPE

RAL Paint

### DOOR TYPE

- Circleslide Automatic Door
- Telescopic Door
- Manual Door






## TRACTION ELEVATOR **SERVICE ELEVATOR**

It is a small service traction elevator with or without a machine room for small capacities.  
It is suitable for service jobs such as libraries, restaurants, hotels, department stores or residential.


### SERVICE ELEVATOR **GUILLOTINE DOOR**



**Counter Dumbwaiter**

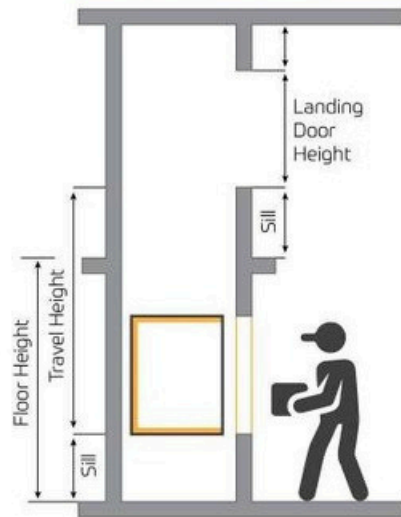

**Floor Dumbwaiter**

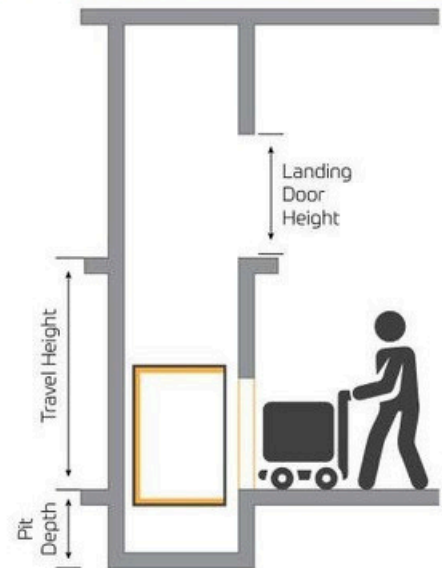

Manufactured in accordance with the machinery directive 2006/42 / EC and EN-81.



Capacity from 100 to 300 Kg.




Travel up to 30 meters (10-15 stops approximately).  
Capacity: 300 Kg.



Smooth and quiet operation.  
Quick and easy installation.




Minimum machine room space.  
No need for a pit.

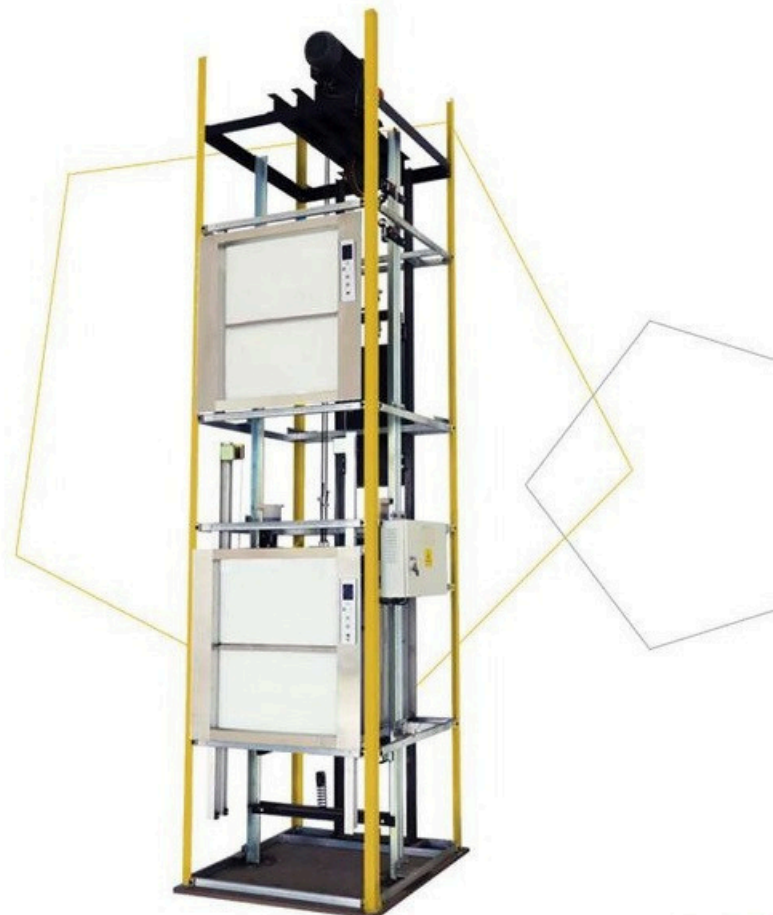







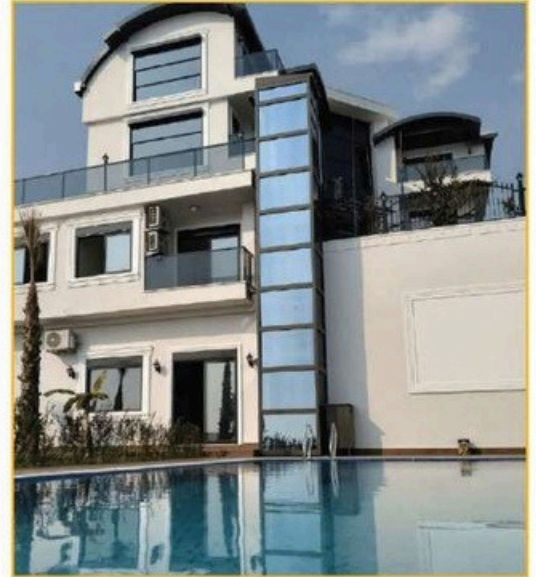



*Elevator systems*  
**> we export to the World**




IG SYSTEMS PROBOTIC PARKING SYS  
ELEVATOR SYSTEMS  
TECHNOLOGY ESCALATOR MOVING WALKWAYS TOUCHLESS TECHN  
DOORS SPARE PARTS ACCESSORIES CABINS DOORS SPARE PARTS ACCESSO



**20** YEARS

of experience

SYSTEMS ELEVATOR SYSTEMS PROBOTIC  
TECHNOLOGY ESCALATOR MOVING WALKWAYS TOU  
ACCESSORIES CABINS DOORS SPARE PARTS

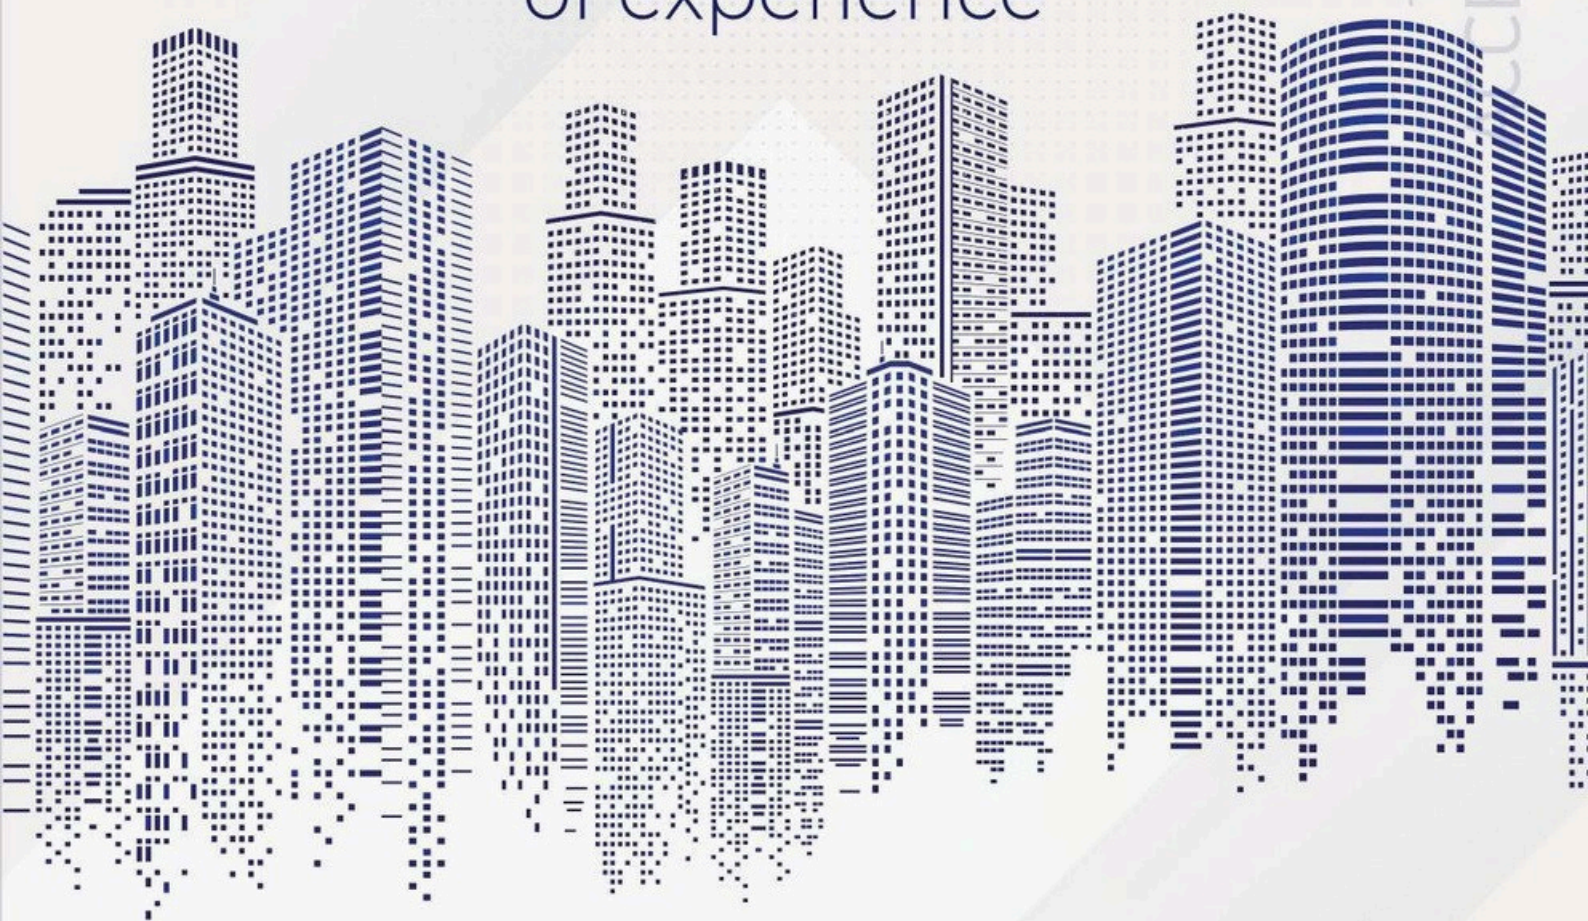



Elevator

**ALAMEX**

Ascending Together

**ALAMEX ASANSÖR**

SANAYİ TİCARET LİMİTED ŞİRKETİ

📍 Fevzi Çakmak Mah. İmsan Sanayi Sit.  
Gülistan Cad. No:40/1 - 42050 Selçuklu/KONYA

☎ +90 (332)503 15 08

✉ info@alamex.com.tr

🌐 www.alamex.com.tr

ASCENDING  
**TOGETHER**

CE TSE EAC

NOM MEXICO